

OWNER'S MANUAL

River 350



Rotostop as
Manufacturer of River Boats™

PRODUCER:	ROTOSTØP AS
ADRESS:	ØSTKILEN 10, 1621 GRESSVIK NORWAY
PHONE:	+47 918 38 820
E-MAIL:	post@rotostop.no
WEB:	www.riverboats.no

DOGA MERKET
Design og
arkitektur



DECLARATION OF CONFORMITY OF RECREATIONAL CRAFT

FOR 15 January 2017 "Regulations on the manufacture and sale of recreational craft and personal watercraft, etc."

Directive 2013/53 /EU replaces Directive 94/25/ES, as amended by Directive 2003/44/ES.

(For 20 December 2004 no. 1820 is repealed by FOR 15 January 2016.)

Directive 94/25/EC and Directive 2003/44/EC are repealed with 18 January 2016. The transitional period lasts until 18 January 2017.

NAME OF PRODUCER: ROTOSTØP AS
ADDRESS: ØSTKILEN 10, 1621 GRESSVIK
COUNTRY: NORWAY

Rotostop as
Manufacturer of River Boats

NAME OF NOTIFIED BODY FOR DESIGN AND CONSTRUCTION ASSESSMENT:

DNV-GL Notified Body No.: 0098

ADDRESS: HEMVÄRNSGATAN 9, 17154 SOLNA, STOCKHOLM SWEDEN



EF TYPE CERTIFICATE NUMBER: RCDB0000066 - 04.07.2017.

Module used for design and construction assessment:

☐ A ☐ B ☐ C ☒ B+C ☐ B+D ☐ B+F ☐ G ☐ H

Description of Recreational Craft

Watercraft Identification Number:

NO-RTS 3

Brand name of Recreational Craft: RIVER Model 350

Type of construction: ☒ Rigid


Type of hull: ☒ Monohull

Hull construction material: ☒ Other: POLYETHYLENE

Recreational Craft

Design category:	C
Max. number of persons:	3
Max. load:	320 kg
Length of hull Lh:	3,4 m
Beam of hull Bh:	1,48 m
Max. draught T:	0,1m
Deck:	Open

Craft main propulsion:	Engine/motor
Integral exhaust propulsion	Yes
Max. recom. engine power:	11,2 kW
Max. recom. engine mass	60 kg



DEALER – DATE AND STAMP

This declaration of conformity is issued under the sole responsibility of the manufacturer. I declare on behalf of the manufacturer that the recreational craft mentioned above fulfils the requirements specified in Article 4 (1) and Annex I of Directive 2013/53/EU.

Name and function:

Signature

Date and place of issue (dd/mm/yyyy):

Essential requirements (reference to relevant articles in Annex IA & IC of the Directive)	Harmonised standard Full Application	Harmonised standard Partial Application, see tech. file	Other reference document Full Application	Other reference document Partial Application, see tech. file	Other proof of conformity See technical file	Specify the harmonised ⁴ standard or other reference document ⁵ used (with year of publication like "EN ISO 8666:2002")
	Tick only one box per line					All lines right of ticked boxes must be filled in
General requirements (2)						
Principal data – main dimensions	<input checked="" type="checkbox"/>					EN ISO 8666:2002
Watercraft Identification Number – W IN (2.1)	<input checked="" type="checkbox"/>					EN ISO 10087:2006
Watercraft Builder's Plate (2.2)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 14945:2004
Protection from falling overboard and means of reboarding (2.3)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 15085:2003+A1:2009
Visibility from the main steering position (2.4)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 11591:2011
Owner's manual (2.5)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 10240:2004
Integrity and structural requirements (3)						
Structure (3.1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 12215-5:2008
Stability and freeboard (3.2)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 12217-3:2015, Option 1, Category C
Buoyancy and flotation (3.3)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 12217-3:2015, Option 1, Category C
Openings in hull, deck and superstructure (3.4)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 9093-2:2002
Flooding (3.5)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 15083:2003
Manufacturer's maximum recommended load (3.6)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 14946:2001
Liferaft stowage (3.7)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Escape (3.8)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Anchoring, mooring and towing (3.9)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 15084:2003
Handling characteristics (4)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 11592:2016
Engines and engine spaces (5.1)						
Inboard engine (5.1.1)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Ventilation (5.1.2)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Exposed parts (5.1.3)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Outboard engine starting (5.1.4)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Fuel system (5.2)						
General – fuel system (5.2.1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 10088:2013
Fuel tanks (5.2.2)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Electrical systems (5.3)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 10133:2012
Steering systems (5.4)						
General – steering system (5.4.1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 9775:1993
Emergency arrangements (5.4.2)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Gas systems (5.5)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Fire protection (5.6)						
General – fire protection (5.6.1)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Fire -fighting equipment (5.6.2)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	EN ISO 9094-201
Navigation lights, shapes and sound signals (5.7)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Discharge prevention (5.8)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A
Annex I.B – Exhaust Emissions ⁵						
Annex I.C – Noise Emissions ⁶						
Noise emission s level (I.C.1)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Owner's manual (I.C.2)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

³ Such as non-harmonised standards, rules, regulations, guidelines, etc.

⁴ Standards published in EU Official Journal

⁵ See Declaration of Conformity of engine manufacturer

⁶ Only to be completed for boats with inboard engines or sterndrive engines without integral exhaust

TABLE OF CONTENTS

- 1. Introduction**
- 2. Drawings/parts list**
- 3. Vessel description**
- 4. Check before use**
- 5. Use of the vessel**
- 6. Towing**
- 7. Landing, lifting and transportation**
- 8. Ordinary maintenance**
- 9. Boat storage**
- 10. Use of heat**
- 11. Repairs and disposal**
- 12. Warranty**
- 13. Salvage/fire**
- 14. Mounting of XR-kit**

1. Introduction

This manual has been prepared to provide the owner / user with the information that is special for the safe use and maintenance of the vessel.

The manual only covers the vessel. Mention of other equipment, such as motor, can be found in the manual for this equipment.

It is assumed that the vessel is not used outside its area of use. It is further assumed that good seamanship is displayed, both during use and maintenance.




Please obtain sufficient expertise before using the boat.

Please keep this manual in a secure place, and hand it over to the new owner when you sell the craft.

Information in this publication is based upon the latest production specifications available at printing. Rotostøp AS reserves the right to make changes at any time, without notice, in the colours, equipment, specifications, materials and prices of all models, or to discontinue models. Should changes in production models be made, Rotostøp AS is not obligated to make similar changes or modifications to models sold prior to the date of such changes. Minor deviations between the manual, technical specifications and the physical boat may occur.

2. Drawings / parts list

River 350 STD

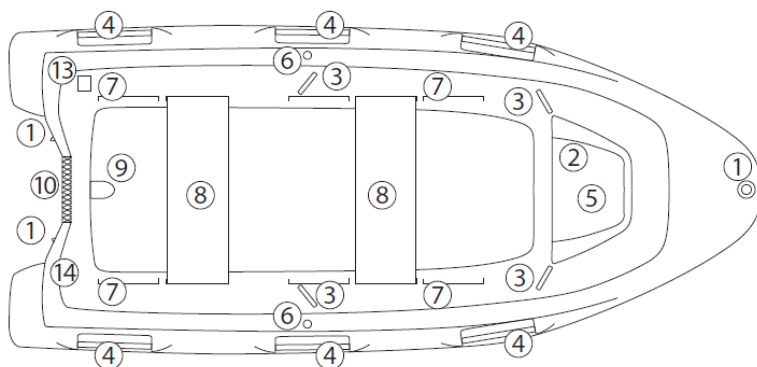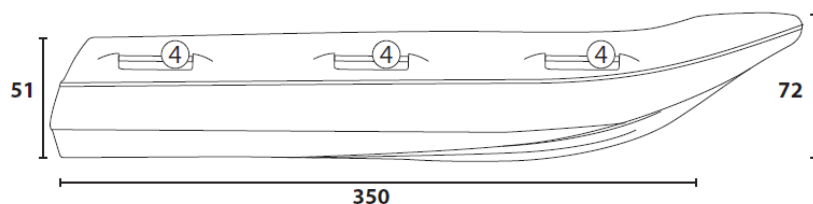

Deleliste / Partslist:




1. Slepe og fortøyningsfester / Towing and Mooring facilities
2. Passasjerseie / Passenger Seat
3. Håndtak / Handle
4. Bære/redningshåndtak / Rescue handle
5. Luke / oppbevaringsrom / Storage
6. Åregaffelholder / Rowlock
7. Toftfester / Mount for landing board
8. Tofter / Landing board
9. Dreneringshull med lenseplugg / Cocpit draining with bilge plug
10. Bakplate/motorfeste / Engine Support Plate
11. Kondensplugg / Condensation plug
12. Dreneringshull / Cocpit draining
13. CE merking / CE marking
14. CIN number / CIN number

* Skrogtykkelse 4 mm

Rotostøp as
Manufacturer of River Boats



River 350 XR

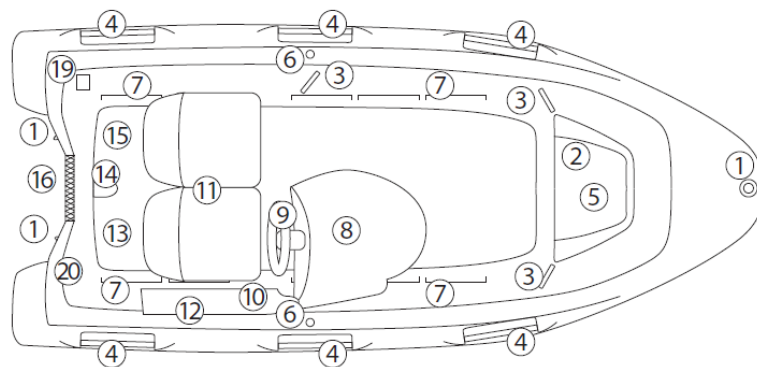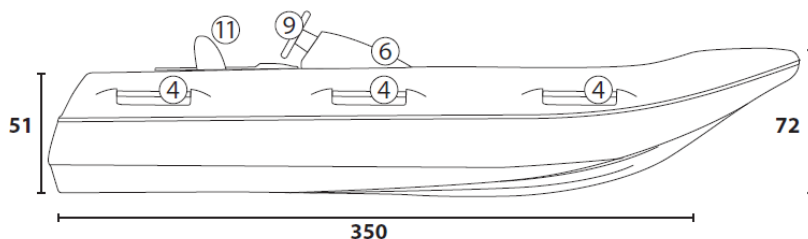

Deleliste / Partslist:

1. Slepe og fortøyningsfester / Towing and Mooring facilities
2. Passasjerseie / Passenger Seat
3. Håndtak / Handle
4. Bære/redningshåndtak / Rescue handle
5. Oppbevaringsrom / Storage
6. Åregaffelholder / Rowlock
7. Toftfester / Mount for landing board
8. Styrekonsoll / Steering console
9. Ratt / styresnekke / Steering wheel
10. Plass for kontrollboks / Room for Engine remote control
11. Dobbelte sete / Double seat
12. Kabeldeksel / Cable cover
13. Plass bensintank / Room for petrol tank
14. Dreneringshull med lenseplugg / Cocpit draining with bilge plug
15. Plass batteri / Room for battery
16. Bakplate/motorfeste / Engine Support Plate
17. Kondensplugg / Condensation plug
18. Dreneringshull / Cocpit draining
19. CE merking / CE marking
20. CIN number / CIN number

* Skrogtykkelse 4 mm

Rotostøp as
Manufacturer of River Boats



3. Vessel description

Your River 350 has the following main dimensions:

Length: 3.50 m Width: 1.50 m


River 350 is CE approved for 3 adults in design category C. The rules describe that one adult can be replaced with two children, as long as each on board has a secure seat with something to hold on to.

Construction category C - Vessel for use along the coast - (Maximum wind strength: Beaufort strength 6, light gale (10.8 - 13.8 m / s), maximum wave height 3.6 m).

Maximum approved engine size is 15 hp (11 kW).

NOTE! See also the engine manufacturer's user manual.

Outboard engine shaft length:	Short
Maximum number of people:	3
Weight of boat (dry and empty):	110 kg
Weight of boat w/steering console:	125 kg
Maximum load:	320 kg
Persons + load + engine max:	380 kg
Draft:	0,1 m

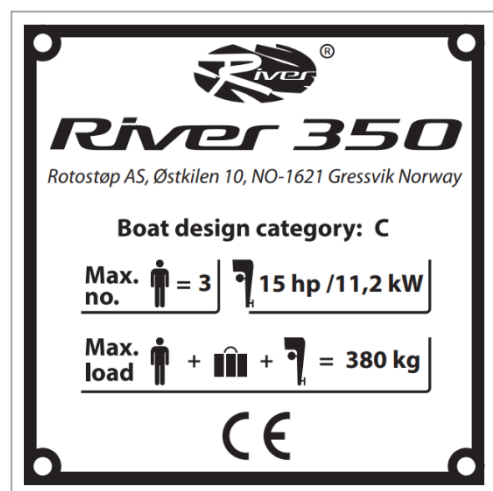

Your River is made of high-quality polyethylene plastic. The material is very impact resistant and durable at normal temperatures. It is fully moulded with a tight cavity which gives the boat very good buoyancy. The River 350 is designed with a hybrid-hull existing of both a V-shaped hull and catamaran-pontoons on each side, which gives the boat good planning properties, sporty driving characteristics and extremely good stability.

Holes in polyethylene plastic are difficult to close as ordinary adhesive systems do not adhere over time. Therefore, under no circumstances should holes be made in the boat to install equipment yourself, without first consulting with the manufacturer.

The maximum load of the boat must not be exceeded under any circumstances.

The vessel is self-draining, but if manual draining is required, a ladle should be used. The expandable drain plug can be used to advantage with high loads to avoid water entering the floor. It is recommended that the boat is always left without the plug in, so that the boat will drain itself for shorter periods without supervision. Be aware that the insurance companies set their own requirements for supervision to fulfil the insurance's validity. It is recommended to check the terms of your insurance company.

4. Check before use

Check that no damage has occurred to the vessel. If the watertight hull is punctured, so that water has entered between the inner and outer hull, the vessel has lost its sink-free properties. Make sure that paddles and life jackets for everyone on board are brought. If you have an outboard motor, follow the inspection routines for this (see the engine manufacturer's instruction manual).

5. Use of the vessel

Driving a boat involves a responsibility, not only for its own passengers, but also for others traveling on the sea. Your River is a very stable and safe vessel, with good seaworthiness. When manoeuvring and using the vessel, good seamanship must still be demonstrated. Always pay attention to the waters the boat is built for. Breaking waves reduce the boat's stability.

It is important to avoid sudden manoeuvres in relation to safety. It is recommended that the speed is reduced at sea and that loose objects are secured. In rough seas, precautions must be taken in relation to the boat's classification. Note that the stop length increases significantly with increasing speed. Be careful when staying in the bow at high speeds, as well as with the correct placement of passengers and cargo.

When people or loads are moved, be aware of stability changes and take this into account. Load placed high in the vessel reduces stability.

If vessels are equipped with an engine, a deadman switch with a string or electronic bracelet must always be used. Should you fall out of the boat during speed, it is vital that the boat's engine stops immediately, so that it does not continue on its own and is a danger to yourself or the surroundings. It is also important that it stops so that you can save yourself on board again.

The boat is approved and certified for self-rescue without a bathing / rescue ladder. This means that it has been tested and proven that a dressed person in the water manages to get on board again alone. This is easiest to do via the bathing platforms on each side of the stern and using the embedded handle on the railing. However, it will be much easier to get on board via a bathing / rescue ladder that is available as optional equipment and is mounted on the port bathing platform.

When refuelling, use only an approved fuel tank. Care must be taken, and all use of open flames during filling is associated with a high risk of fire and explosion.

6. Towing


When your River is being towed, the strong towing eye under the bow should be used. When your River tows another vessel or object, the stern pullers are to be used. By using a "cock foot", you will distribute the load on both fasteners aft and achieve better stability and manoeuvrability, as well as a more even load on the hull. When using davit, approved fastening equipment must be used and the boat must be secured for good stability. 20 mm rope must be used for towing and the maximum load on the towing point/attachment is 1000 kg. 3-strand nylon rope with a breaking strength of 7000 kg is recommended.

7. Landing, lifting and transport

The vessel should not be towed on the ground, as this could cause damage to the bottom. When transporting over land, your River should be lifted using lifting straps. When transporting on a trailer, make sure that the hull does not rest against sharp edges, and that the vessel rests in both specified places (see illustration). The boat must not be transported or stored on a standard boat trailer with a few pulleys / supports, which gives a high point load and can lead to permanent deformation. The most ideal would be boat trailers adapted to rotationally moulded boats with long wheelbases on each side to distribute the point load well over a large area. The boat must be secured / strapped properly for transport but should not be strapped with great force or stand with tightened straps over time as this can cause deformations on the boat.

Since the boat in practice stays completely straight and stably resting on the two side pontoons, a standard goods trailer can also function as a perfect means of transport.

For transport and storage long longitudinal beams, or wheel tracks, should be used in the designated places shown in the illustration. If the two outer positions are used, nothing is needed along the keel.

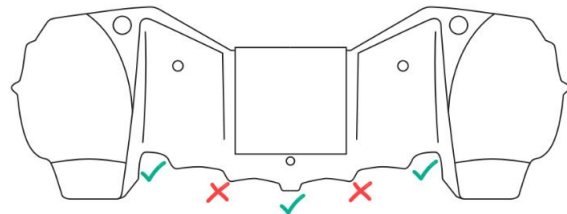

8. Ordinary maintenance

Your River is delivered ready for use from the factory/dealer. During the season, small demands are made on maintenance beyond normal cleaning. Almost all means can be used for cleaning. The plastic can withstand everything from ordinary household products to heavier solvents. It is still recommended to test on a small visible field to see if discoloration or changes in the surface form. Minor scratches, scuffs and damage can be easily sanded down and polished up again to a nice surface. The boat can be treated with a special antifouling and primer system that adheres to polyethylene plastic. Contact your dealer or manufacturer for a detailed description.

Any condensed water inside must be drained from the drain valves on each side aft.

9. Boat storage

In storage, the vessel should be stored dry and covered. The vessel is stored by supporting under the side keels at the rear and the centre keel at the very front so that the rest of the centre keel is hanging in the air. As a good rule, the storage points should be as large areas as possible so that you do not get permanent deformations at too high a point load in a small area.

Before placing the vessel in storage, check that the space between the inner and outer hull does not contain significant amounts of water. If the vessel contains significant amounts of water, the drain plug must be removed, and the vessel tilted up so that the water flows out of the two upper drain-plugs in the aft. If necessary, use the siphon principle or a pump. During storage on land, the drain valve / condensate plug should be open.

If the vessel is stored outdoors, it must be covered for snow load, so that this slips off and does not remain wet and heavy on board the boat. In such extreme cases, the boat can ultimately be deformed and damaged.

The boat can also be stored over time on a boat trailer. But note that a boat trailer with pulleys / wheels that runs in the entire length of the boat is required so that the point load is spread over large parts of the hull. See point 7.

10. Use of heat

Polyethylene loses its strength when heated significantly beyond normal temperatures. Therefore, do not use open flames or other heat on board the boat. In the event of ignition or excessive heating, it will produce heavy smoke (non-toxic), the plastic will become shiny, brittle and lose its mechanical properties, and the boat will no longer meet the current requirements and rules for safe use at sea.

11. Repairs and disposal

In the event of minor damage to the hull, these can be repaired by melting plastic into the damage, like welding. This work should be performed by qualified professionals. When your River is condemned, it must be delivered to a reception for plastic waste. Your dealer can assist in such a process, so that everything is secured in as environmentally friendly way as possible. In the future, a condemned River will be a resource and possible raw material for new recycled production, and thus take part in a circular economy with a minimal climate footprint.

12. Warranty

Your River is delivered with a guarantee against manufacturing and material defects in accordance with the Norwegian Consumer Purchase Act.
For other countries other guarantee rules may apply. This will be stated by your local dealer.

13. Salvage / fire

The vessel is suitable and approved for rescue without a bathing ladder. The boat's outside and inside mounted handrails can be used for self-rescue in the event of a fall overboard. There are 3 outside mounted and 2 inside mounted handrails on each side of the boat.

It is recommended that the boat owner retrofits approved fire extinguishing equipment suitable in accordance with the selected motorization.

14. Mounting of XR-kit



XR SET INSTALLATION INSTRUCTIONS



1. Insert the wire into into the channel.



2. Slide the wire into place in the console.



3. Tighten the steering-cable with a 17mm wrench.



4. Screw the steering-console onto the deck using two M8x20 screws.



5. Place the steering-console and channel with wire inserted in order to align on top.



6. Screw in channel with three self-drilling screws (SPAX) 6 x 40 mm.



7. It is easiest to stand outside while holding the console when screwed in position.



8. Lie inside the boat to screw in the console.
Self-drilling screws (SPAX) 6 X 40mm are used.



9. Seats may be mounted using self-drilling screws (SPAX) 6 x 40 mm fitted as high as possible in the two big holes underneath the seats.

The XR set consists of the steering console, complete steering system, USB charger, two seats and a channel for cables. The holes for the oarlocks are blinded off and a paddle is also included.



DESIGNED AND MANUFACTURED IN NORWAY

River Boats

www.riverboats.no

Please do follow us on social media:



Rotastop as

WARNING

- Do not exceed the maximum approved number of people.
- The total weight of persons and equipment must not exceed the maximum approved weight.
- Approved buoyancy aids/vests are required.
- Never stand several people upright in the boat at the same time.
- Never use an engine with greater power than stated on the CE-sign.
- Always stop the engine before inspecting the propeller.
- When the boat is in motion, no one should sit on the sides of the boat.
- In the event of an explosion or fire on board, post-installed fire extinguishing equipment can be used and/or the vessel must be abandoned.
- Do not drill or screw into the boat, the floor or near/below the waterline to install equipment yourself.

One must be aware of local and international laws and regulations on the environment (cf. Marpol).



River Boats

